

PORK SOLUTIONS // RPS-S

COMPACT SOLUTION FOR ACCURATE ROBOTIC SPLITTING

The Frontmatec-AIRA RPS-S splitter combines a highly optimized and specialized tool using a circular saw with a six-axis industrial robot with hygienic configuration. The carcasses are split into two halves along the spinal canal, which is symmetrically opened. The cut is executed vertically until the end of the atlas vertebra. Alternatively the machine can split the head completely, depending on the customer preferences.

The concept

With Frontmatec-AIRA robots, continuous operation on the dressing line conveyor is maintained, as the robots are synchronized with the main line conveyor; so while carcasses by drop fingers are pulled forward, the position, depth, and angle are determined by the detection unit (vision scanner) and the process is performed in a downward movement.

The Frontmatec-AIRA robotic concept is a dynamic concept, as multiple Frontmatec-AIRA robots can be fitted along the main conveyor of the slaughter line. The Frontmatec-AIRA robots are all “plug and play”, and can operate in any type of new or existing pig slaughter lines.


Hygiene

The integrated sterilization system with its unique cleaning setup secures fast and accurate sterilization by fully enclosing the tool between each operating cycle, allowing the robot to operate at high capacity with negligible risk of cross contamination. The robot itself is enclosed in a strong flexible protective cover with constant air flow inside and lightly over-pressure, keeping the vital part of the robot clean and safe in the harsh environment.



Value for you!

- High capacity: 450 carcasses/hour
- Precise and accurate automated splitting
- Easy to service with quick and easy change of saw blade
- Yield improvements

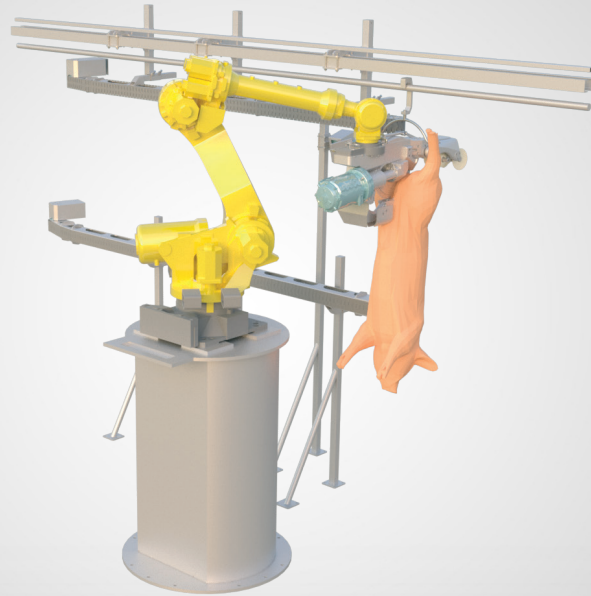

System consisting of:

- Robot with a hygienic protective cover
- Cutting tool attached to the robot
- Sterilization system
- Vision system which is installed along the slaughter line
- Carcass guidance system
- Control unit with transformer box
- Robot fence with secured entrance

Safety and legal requirements

The Frontmatec-AIRA bung dropper is CE approved and designed to meet the strictest demand on health and safety.

Advantages with the Frontmatec-AIRA concept

- A concept founded on more than 20 years in R&D and engineering of automated processing
- Homogeneous processing and high quality cuts
- High hygiene level with integrated sterilization of cutting tools, minimizing the risk of cross contamination
- Reduction of labour cost with one robot
- Human machine interface for setting and adjusting the robot
- Low maintenance
- Easy and swift to clean and keep clean
- Easy operation and troubleshooting with uniform user-friendly operator panels on the Frontmatec-AIRA robots
- The software interfaces with all types of monitoring systems

Pre-conditions

Capacity	450 carcasses/hour
Live weight	60-140 kg/132-308 lbs
Process parameters	Individual cutting parameters for each carcass, customized settings possible
Vision scanner	3D vision system based on optical measuring device
Voltage	380-575V AC 50/60Hz 3 phase
Control voltage	24V DC

Requirements

Water	6 bar (min. 4 bar constantly)
Water consumption	Cold (<20°C) 1.5 liter/pig*
	Hot (>82°C) 0.6 liter/pig*
Compressed air	8 bar (min. 6 bar constantly)

**Dry air, free of oil and dust absorbed. Approved for use in the food industry
ISO 8573-1:2010 Class 1.4.1*

**Values are based on experience in the field and cannot be guaranteed, as many factors can influence these numbers*

**Technical data may be subject to changes*

Frontmatec-AIRA_V1-0_2024_EN

CONTACT

Central/Eastern Europe
+49 252 185 070
service.de@frontmatec.com

Northern Europe, Kolding
+45 36 999 099
service.kol.dk@frontmatec.com

Northern Europe, Tandslet
+48 227 345 551
service.tan.dk@frontmatec.com

Southern Europe
+34 932 643 800
service.es@frontmatec.com

Western Europe
+31 886 294 000
service.nl@frontmatec.com